

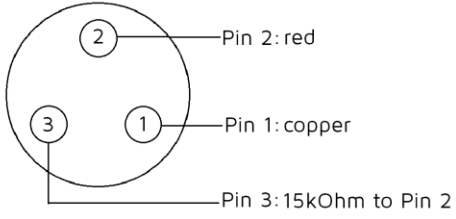

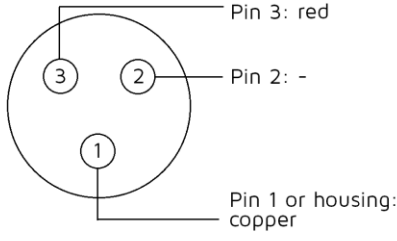
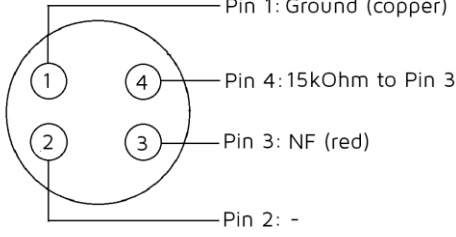
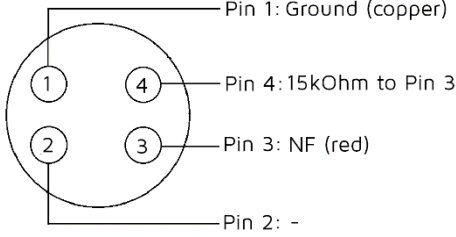


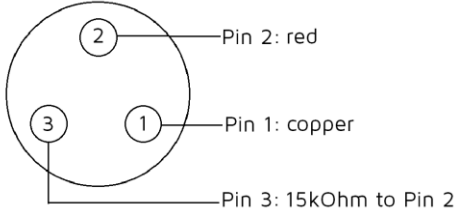
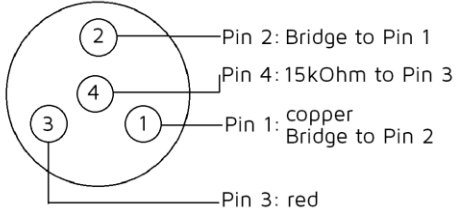
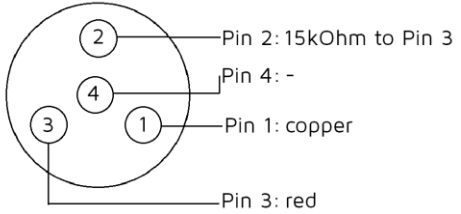
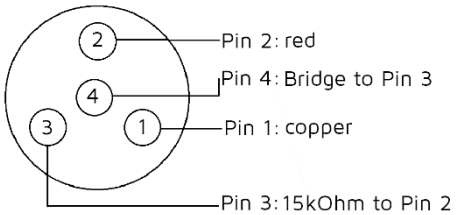
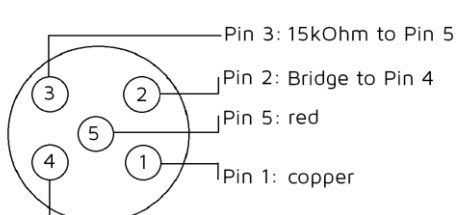
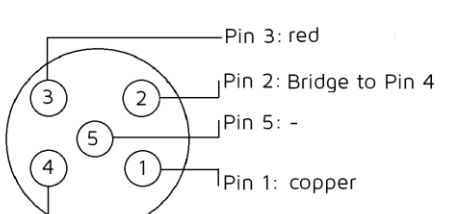
Swiss precision for excellent audio quality

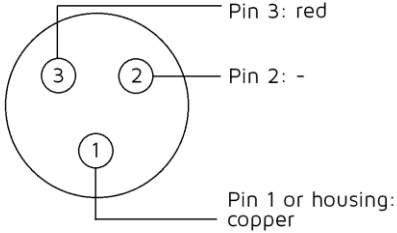
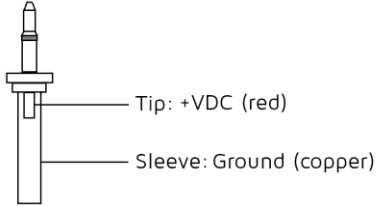
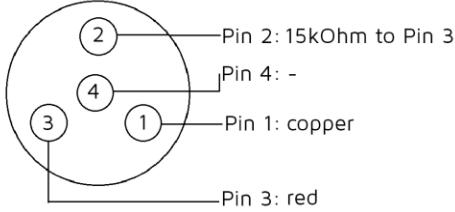
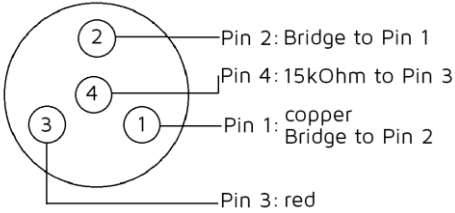
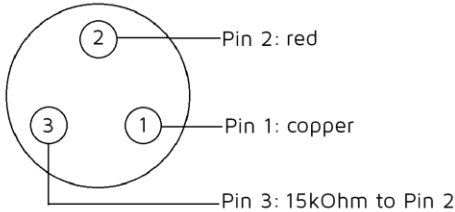

VOICE TECHNOLOGIES


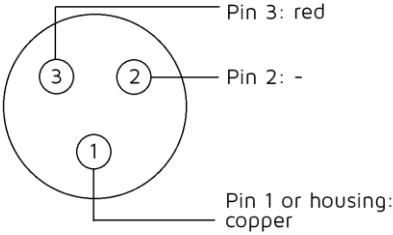
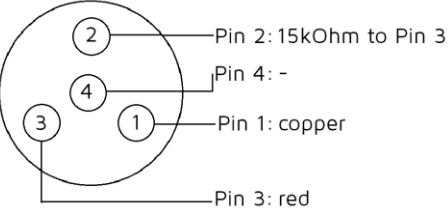
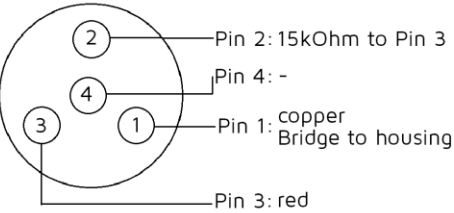
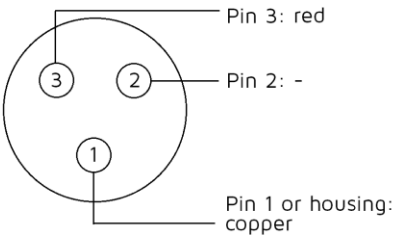
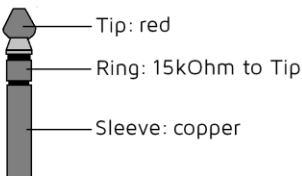
Wiring

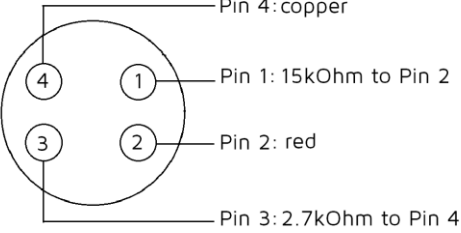
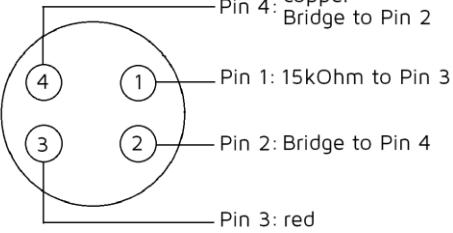
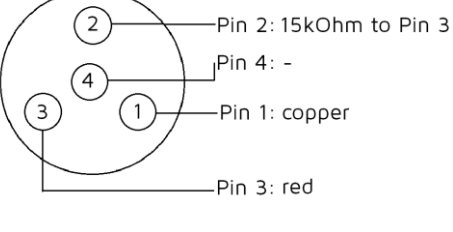
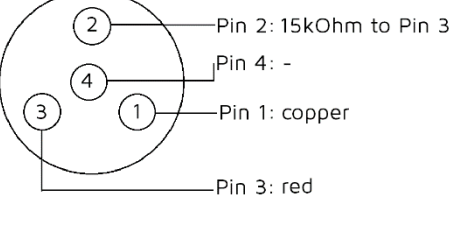
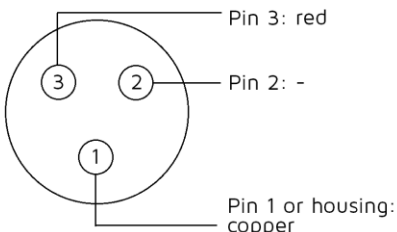
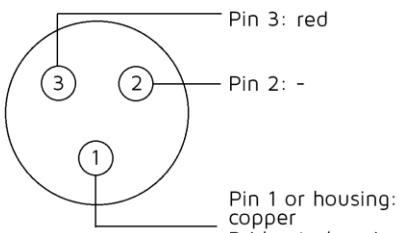
VT701, 901, Duplex

| Brand | Connector | Wiring |
|----------------|-----------------|--|
| AKG | TA3F |  |
| AKG B-Lock | 3.5 mm Mono |  |
| Audio Limited | Lemo 3-Pin |  |
| Audio Technica | Hirose 4-Pin |  |
| Audio Technica | Hirose_ch 4-Pin |  |

| Brand | Connector | Wiring |
|----------------------------------|-----------|---|
| Audix | TA3F |  <p>Pin 2: red Pin 1: copper Pin 3: 15kOhm to Pin 2</p> |
| Beyerdynamic Opus | TA4F |  <p>Pin 2: Bridge to Pin 1 Pin 4: 15kOhm to Pin 3 Pin 1: copper Bridge to Pin 2 Pin 3: red</p> |
| Beyerdynamic TG-Series | TA4F |  <p>Pin 2: 15kOhm to Pin 3 Pin 4: - Pin 1: copper Pin 3: red</p> |
| Electro Voice | TA4F |  <p>Pin 2: red Pin 4: Bridge to Pin 3 Pin 1: copper Pin 3: 15kOhm to Pin 2</p> |
| Lectrosonics SM-Series 3-wire | TA5F |  <p>Pin 3: 15kOhm to Pin 5 Pin 2: Bridge to Pin 4 Pin 5: red Pin 1: copper Pin 4: Bridge to Pin 2</p> |
| Lectrosonics SM-Series 2-wire | TA5F |  <p>Pin 3: red Pin 2: Bridge to Pin 4 Pin 5: - Pin 1: copper Pin 4: Bridge to Pin 2</p> |

| Brand | Connector | Wiring |
|--------------|---------------------|---|
| Lectrosonics | Lemo 3-Pin |  <p>Pin 3: red Pin 2: - Pin 1 or housing: copper</p> |
| Lectrosonics | WPMC 2.5 mm Mono |  <p>Tip: +VDC (red) Sleeve: Ground (copper)</p> |
| Line 6 | TA4F |  <p>Pin 2: 15kOhm to Pin 3 Pin 4: - Pin 1: copper Pin 3: red</p> |
| Mipro | TA4F |  <p>Pin 2: Bridge to Pin 1 Pin 4: 15kOhm to Pin 3 Pin 1: copper Pin 1: Bridge to Pin 2 Pin 3: red</p> |
| Monacor | TA3F |  <p>Pin 2: red Pin 1: copper Pin 3: 15kOhm to Pin 2</p> |
| Rode | 3.5 mm Stereo |  <p>Tip: red Ring: - Sleeve: copper</p> |

| Brand | Connector | Wiring |
|----------------------------|---------------|--|
| Sennheiser Evolution & AVX | 3.5 mm Stereo |  <p>Tip: red Ring: - Sleeve: copper</p> |
| Sennheiser prof. series | Lemo 3-Pin |  <p>Pin 3: red Pin 2: - Pin 1 or housing: copper</p> |
| Shure | TA4F |  <p>Pin 2: 15kOhm to Pin 3 Pin 4: - Pin 1: copper Pin 3: red</p> |
| Shure digital | TA4F |  <p>Pin 2: 15kOhm to Pin 3 Pin 4: - Pin 1: copper Bridge to housing Pin 3: red</p> |
| Shure | Lemo 3-Pin |  <p>Pin 3: red Pin 2: - Pin 1 or housing: copper</p> |
| Sony | 3.5 mm Stereo |  <p>Tip: red Ring: 15kOhm to Tip Sleeve: copper</p> |

| Brand | Connector | Wiring |
|---------|-------------------------------|---|
| Sony | Hirose 4-Pin (old version) |  <p>Pin 4: copper</p> <p>Pin 1: 15kOhm to Pin 2</p> <p>Pin 2: red</p> <p>Pin 3: 2.7kOhm to Pin 4</p> |
| Sony | Hirose 4-Pin (new version) |  <p>Pin 4: copper Bridge to Pin 2</p> <p>Pin 1: 15kOhm to Pin 3</p> <p>Pin 2: Bridge to Pin 4</p> <p>Pin 3: red</p> |
| Telex | TA4F |  <p>Pin 2: 15kOhm to Pin 3</p> <p>Pin 4: -</p> <p>Pin 1: copper</p> <p>Pin 3: red</p> |
| Toa | TA4F |  <p>Pin 2: 15kOhm to Pin 3</p> <p>Pin 4: -</p> <p>Pin 1: copper</p> <p>Pin 3: red</p> |
| Wisycom | Lemo 3-Pin |  <p>Pin 3: red</p> <p>Pin 2: -</p> <p>Pin 1 or housing: copper</p> |
| Zaxcom | Lemo 3-Pin |  <p>Pin 3: red</p> <p>Pin 2: -</p> <p>Pin 1 or housing: copper Bridge to housing</p> |